


Operating Guide

AHQM (PN 16) / 73695530


AHQM, DN 40-50




MAINTENANCE
FREE




DN 40, 50




DN 50




AMV(E) 435 +
AHQM DN 40, 50

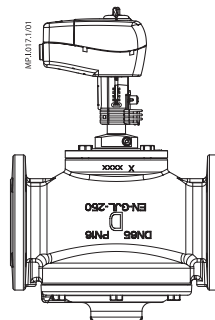




AMV(E) 435 +
AHQM DN 50



AMV(E) 438 SD +
AHQM DN 40, 50

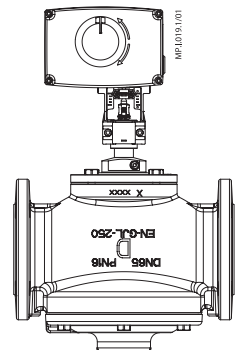

AMV(E) 438 SD +
AHQM DN 50

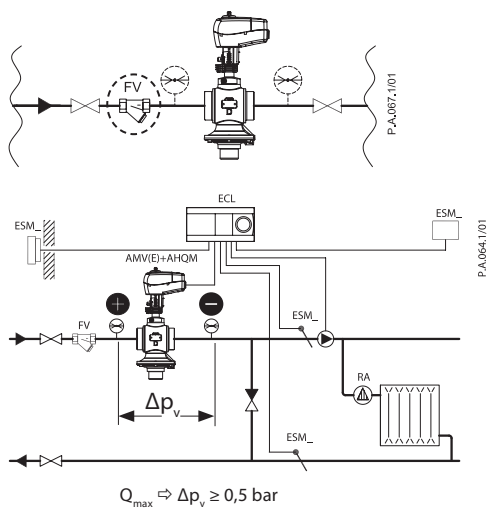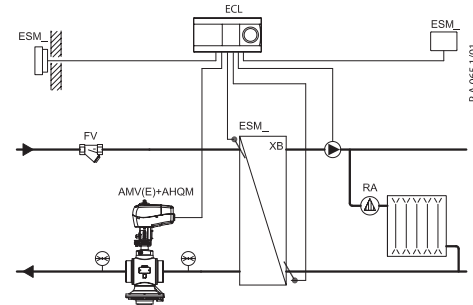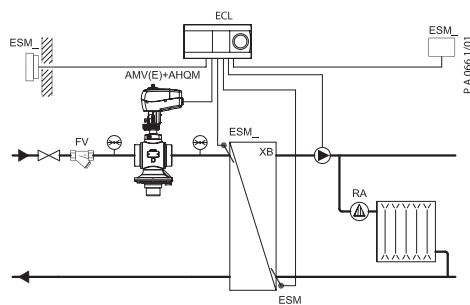


max. t: 120 °C
min. t: 2 °C

max. PN: 16 bar

max. P_{test} : 24 bar




$P_{test} = 1,5 \times PN$




Δp_v : 0,5-4,0 bar

AHQM (PN 16)

DN 40-50

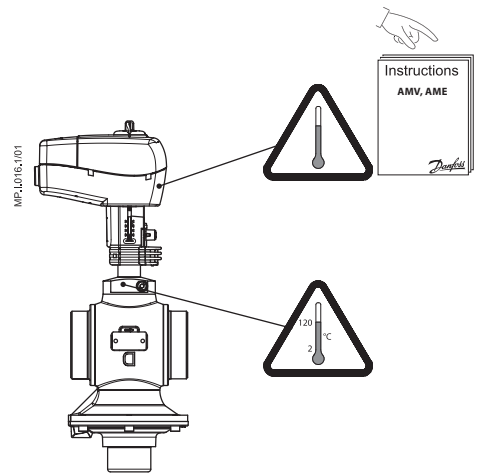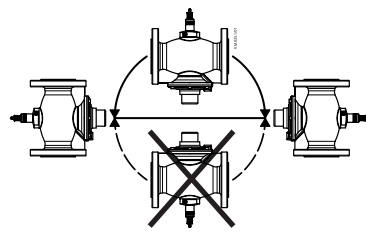


DN	L (mm)
40	114
50	134




P.M.164.2/03




P.M.139.1/01




P.M.140.1/01




P.M.142.1/01

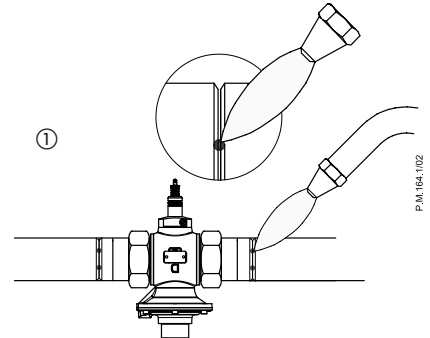


P.M.164.1/02

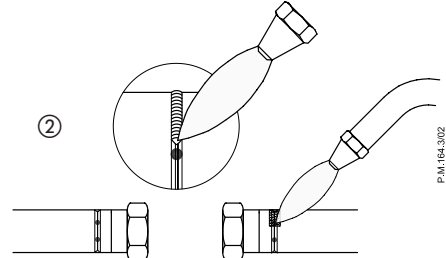



P.M.164.3/02




P.M.164.4/01

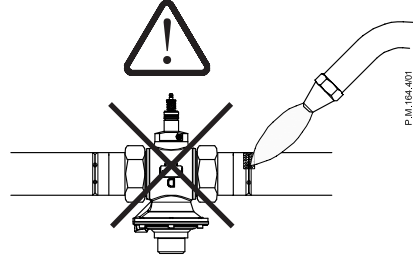

P.M.164.4/01

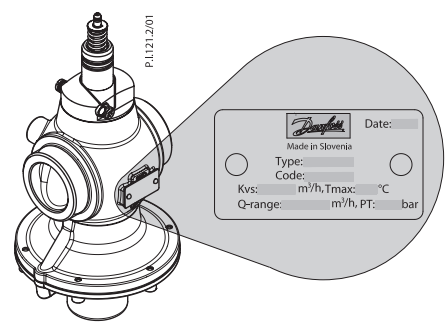

P.M.120.1/01

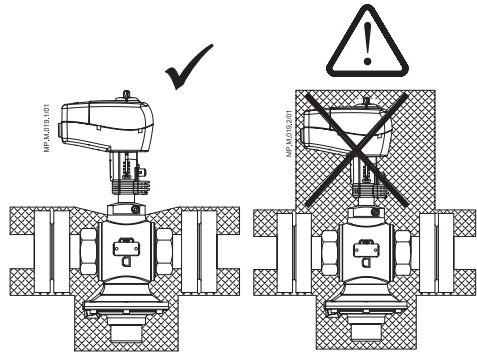


P.M.164.5/01





P.M.164.5/01

AHQM (PN 16)


1

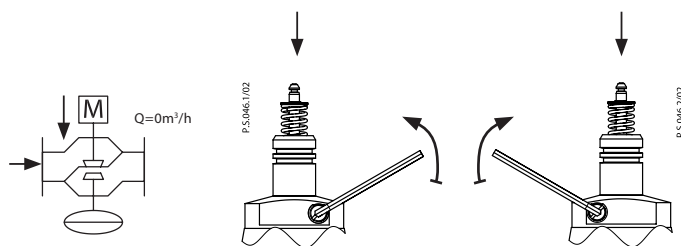

2




3

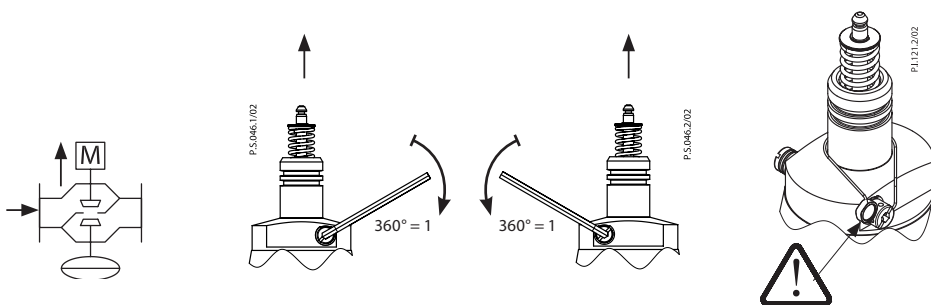


AHQM (PN 16)


AMV(E) 435 + AHQM

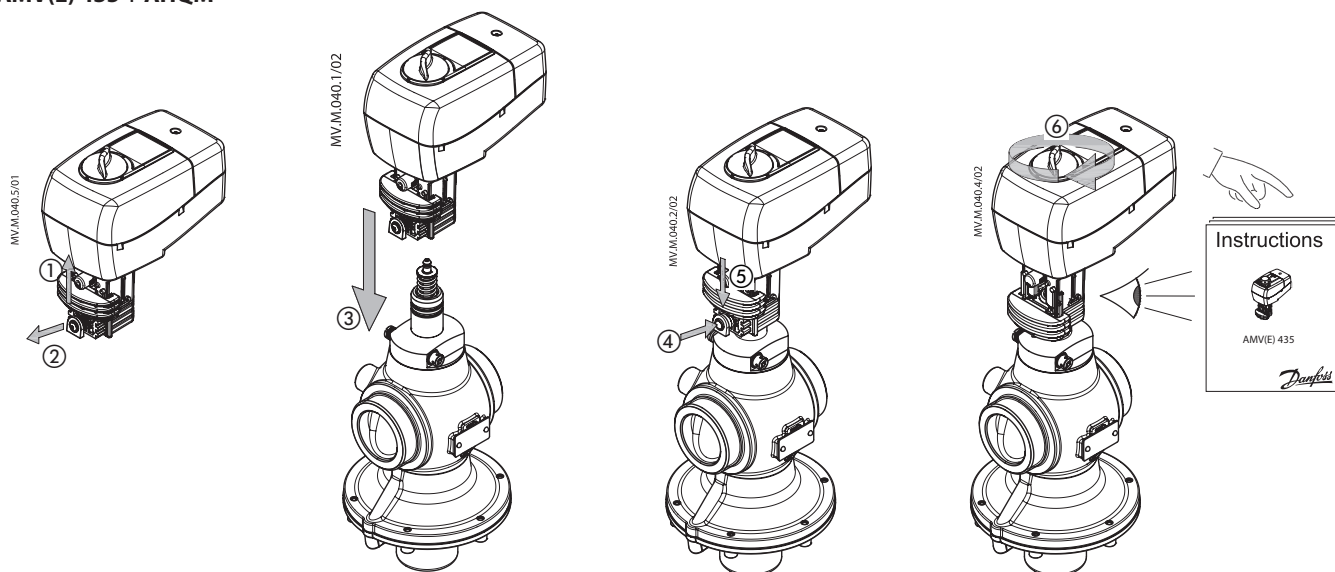


AMV(E) 438 SD + AHQM

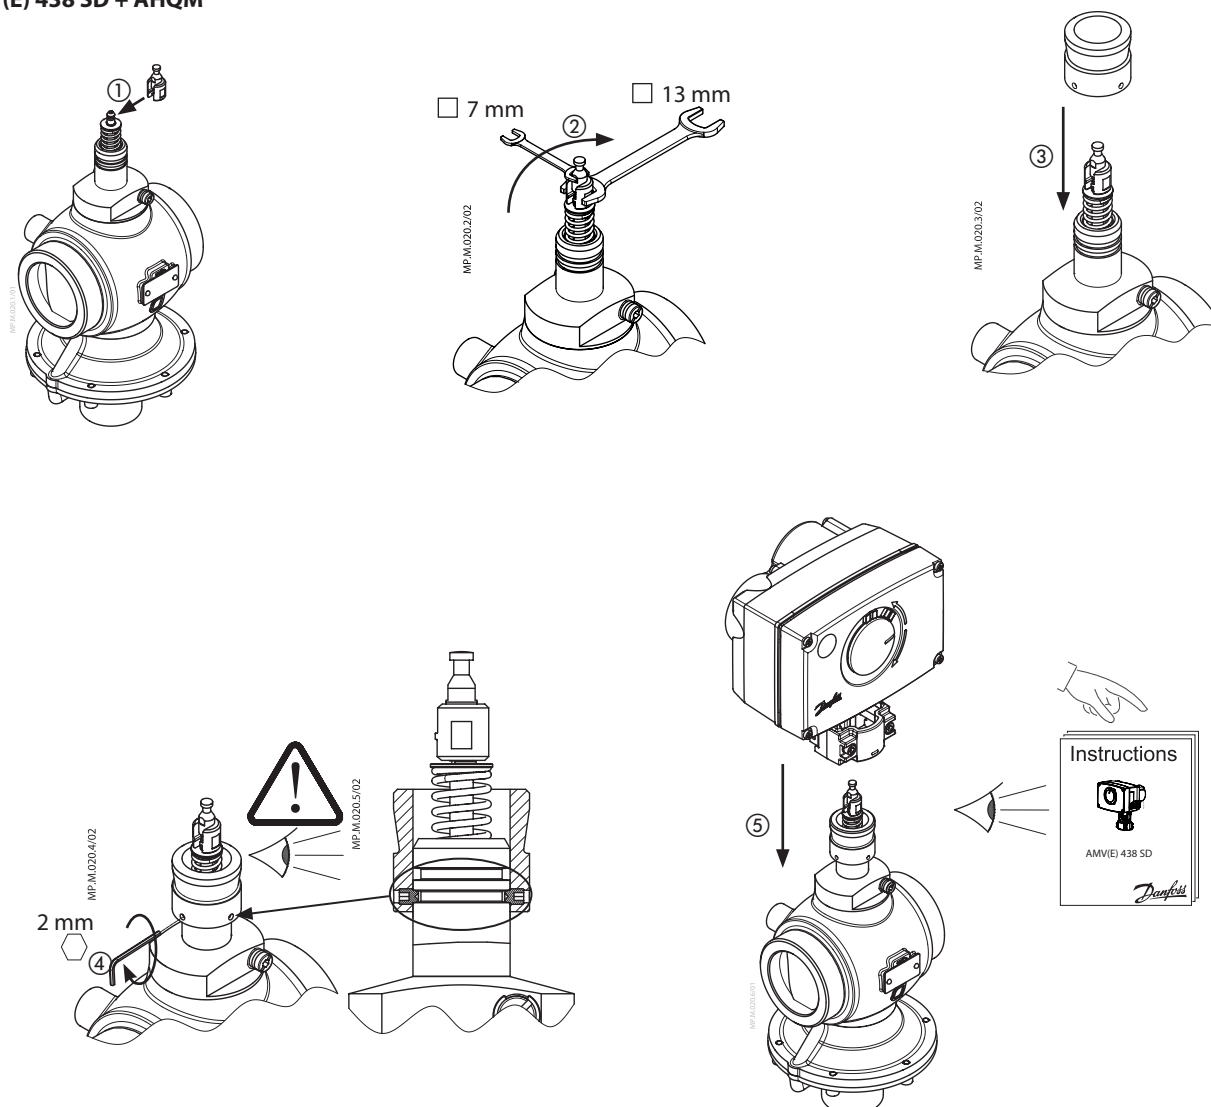


AHQM (PN 16)



DN 40, 50


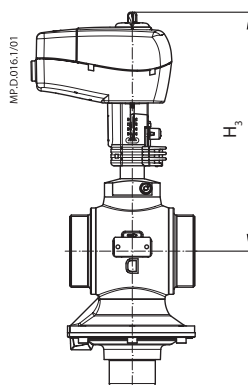


AMV(E) 435 + AHQM

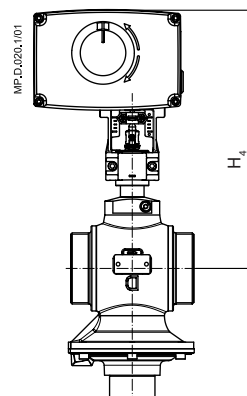


AMV(E) 438 SD + AHQM


DN	L ₁	H ₁	H ₂	H ₃	H ₄	b
	mm					ISO 228/1
40	110	141.5	141	247.5	272.5	G 2
50	130	141.5	141	247.5	272.5	G 2½




DN	40	50
R	1½	2
SW ₁	64	80
SW ₂	70	82
d	48.3	60.3
L ₁	200	244
L ₂	204	234
H ₁	141.5	141
H ₂	141.5	141

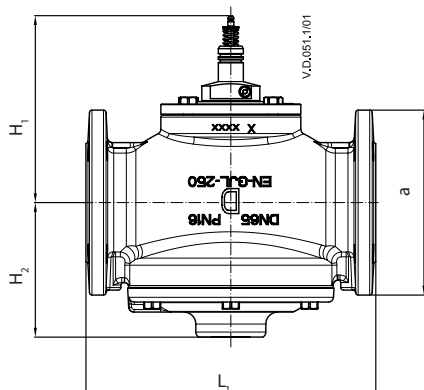

DN 50

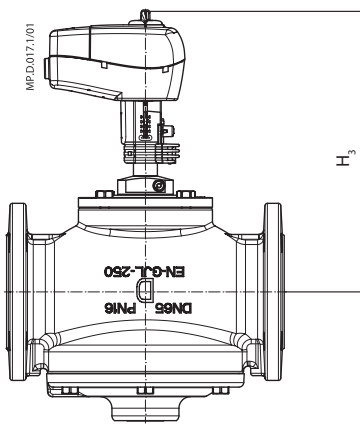

AMV(E) 435 + AHQM

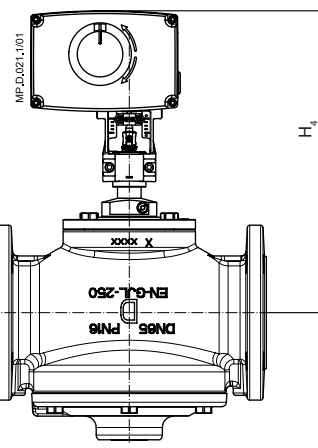

AMV(E) 438 SD + AHQM

DN	L ₁	H ₁	H ₂	H ₃	H ₄	a
	mm					(EN 1092-2)
50	230	141.5	141	247.5	272.5	165



Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.