


Kształtka wielorozgałęźna Geberit PE 88,5°, podejścia co 90°

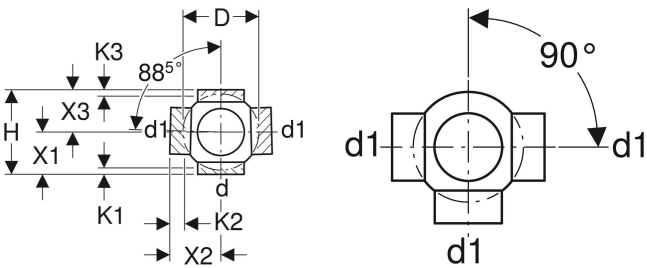

Ilustracja przykładowa

PRZEZNACZENIE

- Do kanalizacji wewnątrz konstrukcji budowli

CHARAKTERYSTYKA

- Odporny na promieniowanie UV

DANE TECHNICZNE

Materiał PE-HD

Nr art.	DN	d, ø mm	d1, ø mm	arc °	arc2 °	D cm	H cm	X1 cm	X2 cm	X3 cm	K1 maks. cm	K2 maks. cm	K3 maks. cm
364.605.16.1	60	63	63	88.5	90	10	16	8	10	8	1.5	4.5	1.5
365.605.16.1	70	75	75	88.5	90	12	16	8	10	8	1.5	3.5	1.5
366.605.16.1	80	90	90	88.5	90	14	18	9	11	9	2	4	2
367.605.16.1	100	110	110	88.5	90	17	20	10	12	10	1.5	4	1.5
368.605.16.1	125 / 100	125	110	88.5	90	18	20	10	12	10	1.5	4	1.5
369.605.16.1	150 / 100	160	110	88.5	90	23	25	12.5	16	12.5	2	1.5	2