



Thermischer Stellantrieb – Thermal actuator – Moteur Thermique – Actuador térmico –
Actuator functie – Attuatore termico – Actuator funksjon – Forstagangen aktuator –
Terminen toimilaite – Siłownik termoelektryczny

**Einbauanleitung – Installation instructions – Instructions d’installation –
Instrucciones de instalación – Installatie instructies – Istruzioni per l’installazione –
Installasjonsinstruksjon – Forstagangen installasjon – Asennusohje – Instrukcja montażu**



Max. 50°C / 122°F
Min. 0°C / 32°F







230 V AC




24 V DC

Montage – Assembly – Montage – Montaje – Montaggio – Montering – Asennus – “Montaż”

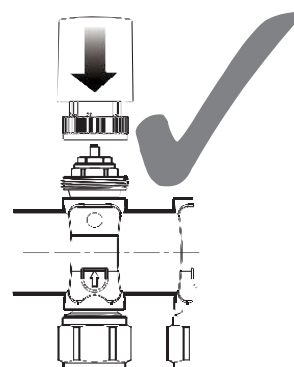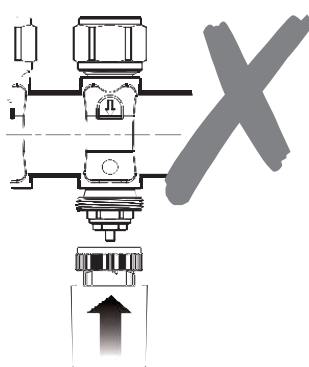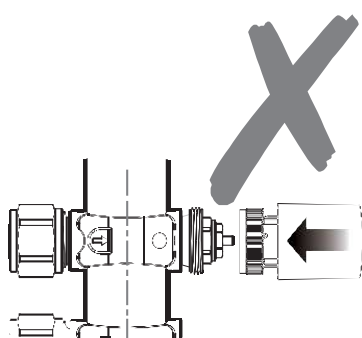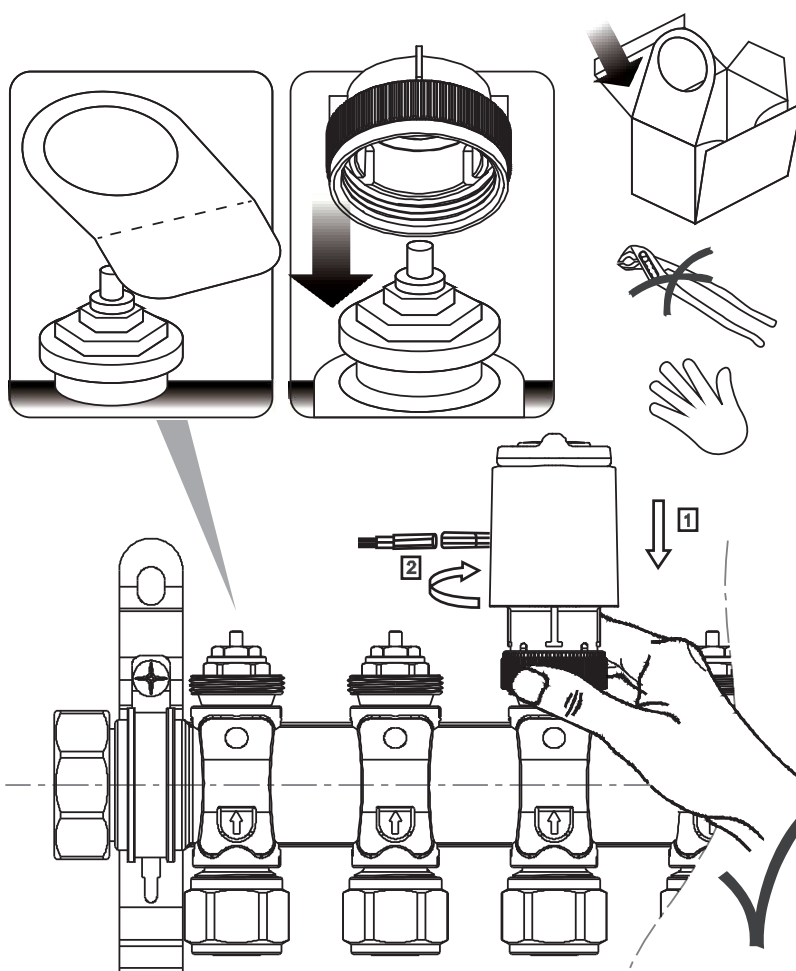



NC - NORMALLY CLOSED

“First Open” Funktion – “First Open” function – Fonction “First Open” – Funcion de contacto abierto – “First Open” functie – Funzione “First Open” – “First Open” funksjon – “Forstagangen” funktion – “First Open” toiminta – Funkcja “First Open”

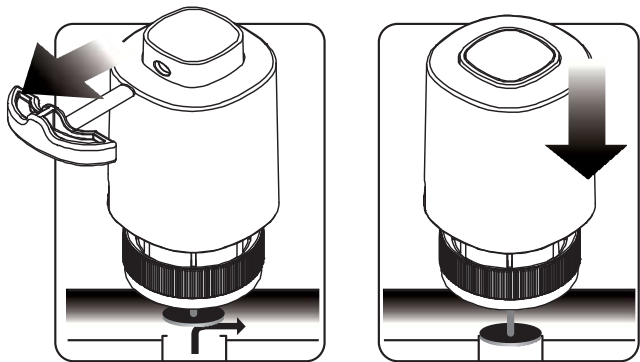

FUNCTION

Funktionsweise – Function mode – Mode de fonctionnement – Funcionamiento – Werkwijze – Modo di funzione – Funktionsmade – Funksjonsmodus – Funktionssatt – Toimintaperiaate – “Zasada działania”

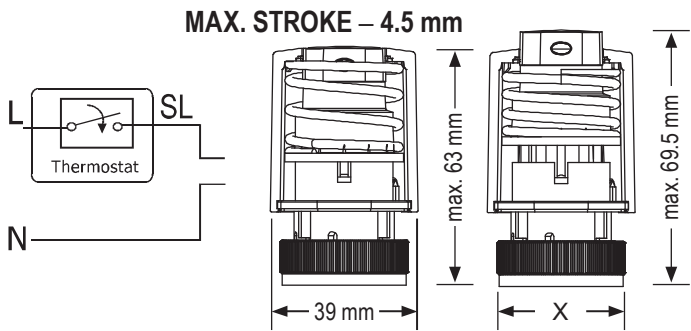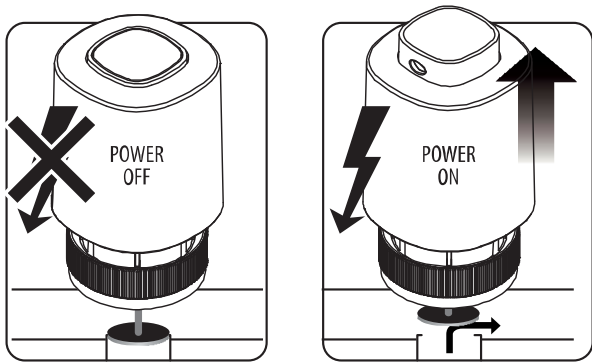

X	M30*1.5mm	M28*1.5mm
T30NC230A / T30NC230WBA	✓	
T30NC24A / T30NC24WBA	✓	

UK
SALUS Controls plc
Units 8-10
Northfield Business Park
Forge Way
Parkgate
Rotherham
S60 1SD
Tel: 01226 323961
Email: sales@salus-tech.com

EU
SALUS Controls GmbH
Dieselstrasse 34
63165 Mühlheim am Main
Tel: +49 (0) 6108 825850
Email: info@salus-controls.de

